No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
1			
2			

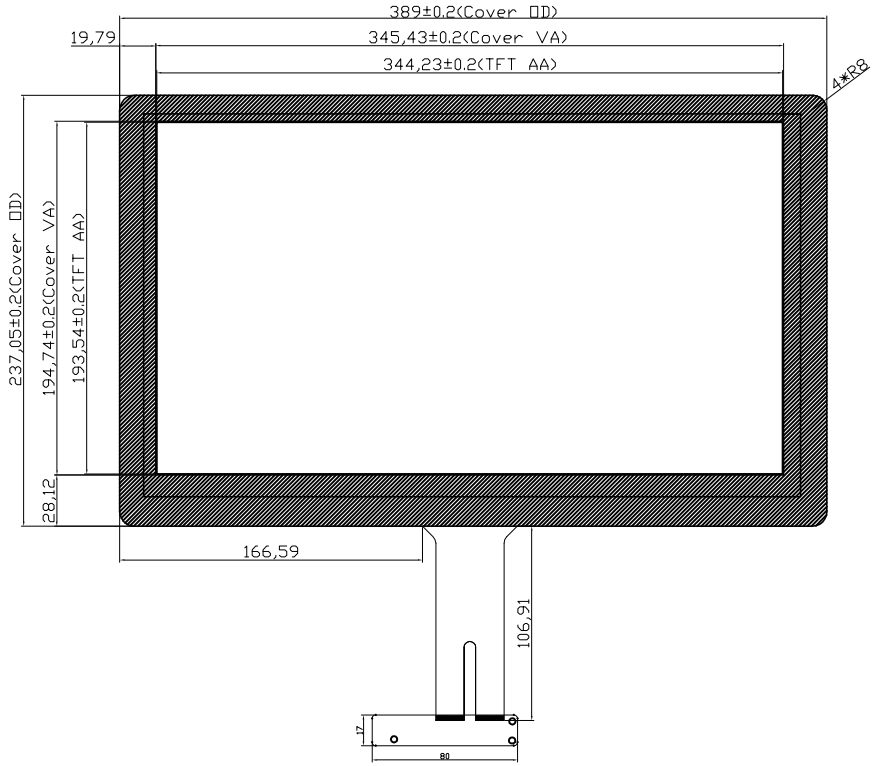

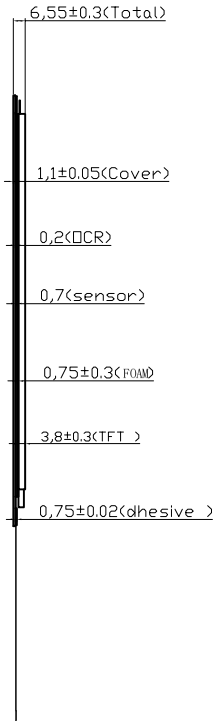

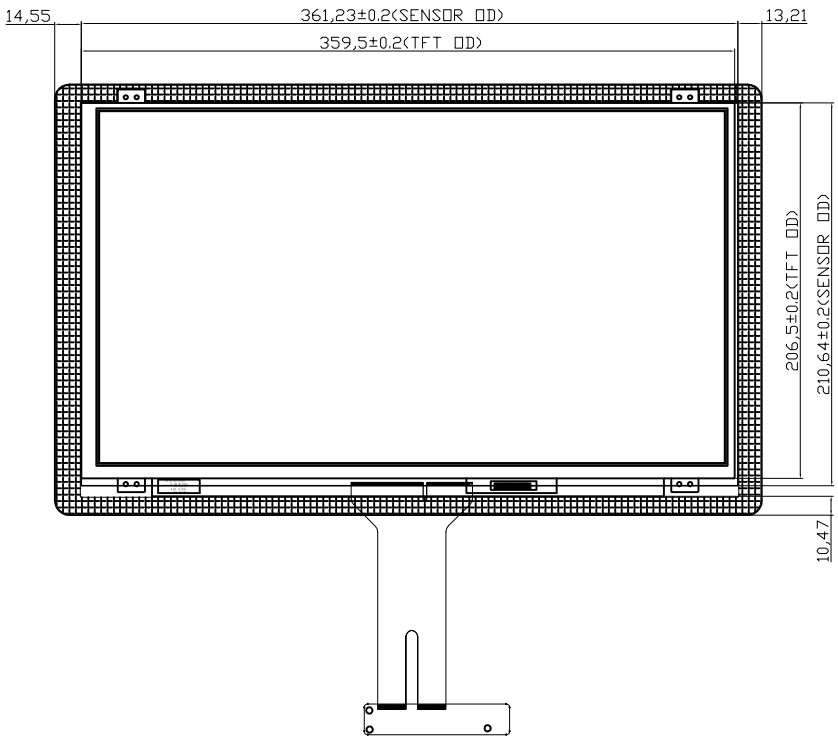

Screen printing area: Print Black

Frame adhesive foam area = 0.75mm

Frame adhesive area =0.7mm

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

Front view

Side view

Back view

Technical parameters			
1. Interfaces:	USB	7. Humidity range:	45～85%RH
2. Structure :	G+G+TFT	8. Transmittance:	≥85%
3. IC solutions:	ILI2302M	9. Surface hardness:	≥6H
4. Impact resistance:	30.0ΦDIA.Steel Ball/132g/Height=35cm/1time	10. Operate :	-10℃～+60℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-20℃～+70℃, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance as±0.5	

TFT(NT156FHM-N41) PIN:

1	2	3	4	5	6	7	8	9	10
NC	H-GND	Lane1-N	Lane1-P	H-GND	Lane0-N	Lane0-P	H-GND	AUX-CH-P	AUX-CH-N
11	12	13	14	15	16	17	18	19	20
H-GND	LCD-VCC	LCD-VCC	NC	LCD-GND	LCD-GND	HPD	BL-GND	BL-GND	BL-GND
21	22	23	24	25	26	27	28	29	30
BL-GND	BL-ENABLE	BL-PWM-DIM	NC	NC	BL-PWR	BL-PWR	BL-PWR	BL-PWR	NC

杭州宏枭科技有限公司
GraHowlet Technology CO.,Ltd

Model	HX1561705			view direction		Unit	MM
Version	V2.0	Designer	LUO	Date	2017-7-28	Edition	A1
Customer		Approved	HBZ	Date	2017-7-28	Proportion	1:1